



KB 20 S is shown



KB 32 SF is shown

- Modern design, high-quality cast-iron, and excellent workmanship combined with superior rigidity, function and appearance
- Heavy, precision-ground work table with diagonal T-slots
- Very smooth height adjustment of drill table, even under high loads
- Large base plate with ground setup area and parallel T-slots
- Forward and reverse, plus automatic reversal of direction for thread cutting
- Spindle shank and spindle are hardened and ground
- Robust belt drive and quiet, powerful motor
- Digital speed display and integrated LED work lamp are included

Standard Equipment


drill chuck, tool-holder bits, drill press vise, tapping unit, operating tools

Options

For this machine, visit our website and search for KB 20 S or KB 32 SF (Product Search)



Digital rpm display and rigid depth stop

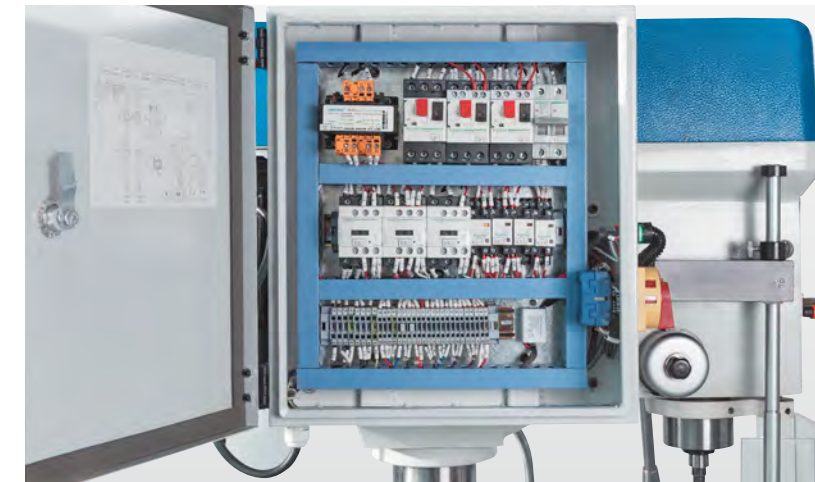

Premium industrial grade electric components



Universal machine base with storage room for the KB 20 S Part No. 123952

Specifications

		KB 20 S	KB 32 SF
Working Area			
Drilling capacity	mm	20	32
Tapping capacity (max.)		M 20	M 24
Table set up area	mm	255x255	330x330
Spindle nose-to-table dist.	mm	366	813
Spindle nose-to-foot distance	mm	678	1.236
Throat	mm	240	265
Column diameter	mm	85	100
Headstock			
Speed range	rpm	320 - 1.820	320 - 1.820
Spindle mount		MT 2	MT 3
Quill stroke	mm	135	150
Drive Capacity			
Main motor rating	kW / V	1,1 / 400	1,5 / 400
Measures and Weights			
Overall dimensions (length x width x height)	m	0,94x0,49x1,39	1x0,6x2,1
Weight	kg	170	225
Part No.		170460	170461